



EXPLOSION PROOF LOUDSPEAKER

Product Model: JWBY-25

Defend Grade: IP66

Material: Aluminum Alloy

Color: Yellow (Optional)



Technical Parameters

Explosion-proof mark	ExdIICT6
Power	25W (10W/15W/20W)
Impedance	8Ω
Frequency Response	250~3000 Hz
Ringer Volume	100-110dB
Corrosion Grade	WF1
Ambient Temperature	-30~+60℃
Atmospheric Pressure	80~110KPa
Relative Humidity	≤95%
Lead Hole	1-G3/4"
Installation	Wall-mounted



Application

1. Suitable for explosive gas atmospheres Zone 1 and Zone 2.
2. Suitable for IIA, IIB explosive atmosphere.
3. Suitable for dust Zone 20, Zone 21 and Zone 22.
4. Suitable for temperature class T1 ~ T6.
5. Hazardous dust and gas atmospheres, petrochemical industry, Tunnel, metro, railway, LRT, speedway, marine, ship, offshore, mine, power plant, bridge etc high noise places.




Features

1. Can be connected with Joiwo Explosion proof Telephone used in hazardous industrial environment.
2. Aluminium alloy shell, high mechanical strength, impact resistant.
3. Shell surface temperature electrostatic spray, anti-static ability, eye-catching color.



Product Dimensions

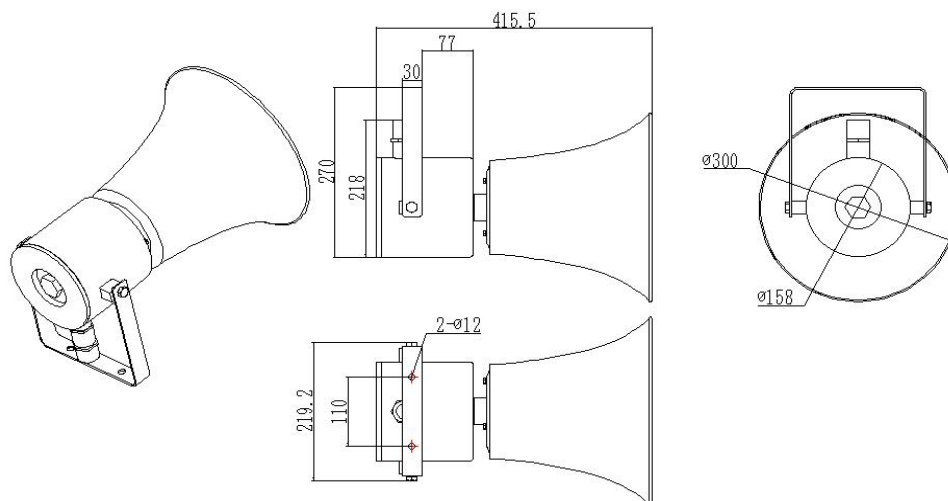

Package

Unit size: $\Phi 300 \times 415$ (mm)

Carton size: 44*41.5*41.5cm

Packaging materials: Pearl cotton, Carton

Net weight: 6 KG

Gross weight: 6.5 KG



Service and Support

Under normal use, non-human damage, free **THREE YEAR WARRANTY**.